

The Port of Hueneme Confined Aquatic Disposal Project: A Unique Partnership for Contaminated Sediment Management

Presented by Jack Malone, Ph.D. Steve Cappellino

May 11, 2011

maintaining the data needed, and c including suggestions for reducing	lection of information is estimated to ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding ar DMB control number.	ion of information. Send comments arters Services, Directorate for Infor	regarding this burden estimate of mation Operations and Reports	or any other aspect of the 1215 Jefferson Davis	is collection of information, Highway, Suite 1204, Arlington	
1. REPORT DATE 11 MAY 2011		2. REPORT TYPE		3. DATES COVE 00-00-2011	red to 00-00-2011	
4. TITLE AND SUBTITLE				5a. CONTRACT	NUMBER	
The Port of Hueneme Confined Aquatic Disposal Project: A Unique Portnership for Contaminated Sediment Management				5b. GRANT NUMBER		
Partnership for Contaminated Sediment Management			5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)				5d. PROJECT NU	JMBER	
			5e. TASK NUMBER			
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Anchor QEA,26300 La Alameda Suite 240,Mission Viejo,CA,92691				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/M NUMBER(S)	ONITOR'S REPORT	
12. DISTRIBUTION/AVAII Approved for publ	LABILITY STATEMENT ic release; distributi	on unlimited				
	OTES DIA Environment, I I in New Orleans, L	•	•		um & Exhibition	
14. ABSTRACT						
15. SUBJECT TERMS						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF	18. NUMBER	19a. NAME OF	
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)	OF PAGES 31	RESPONSIBLE PERSON	

Report Documentation Page

Form Approved OMB No. 0704-0188

Overview

- Site and project history
- Confined Aquatic Disposal (CAD) concept
- Partnership strategy and cost allocations
- Permitting and design
- Post-construction monitoring
- Lessons learned
- Project benefits



Project Team

- U.S. Navy (USN)
 - Naval Base Ventura County
 - Naval Facilities Engineering Command (NAVFAC)
 Southwest
- Oxnard Harbor District (OHD)
- U.S. Army Corps of Engineers (USACE), Los Angeles District
- Anchor QEA, L.P.
 - Everest International Consultants, Inc.
 - iLanco Environmental, LLC




Port of Hueneme





Port of Hueneme – Joint Use

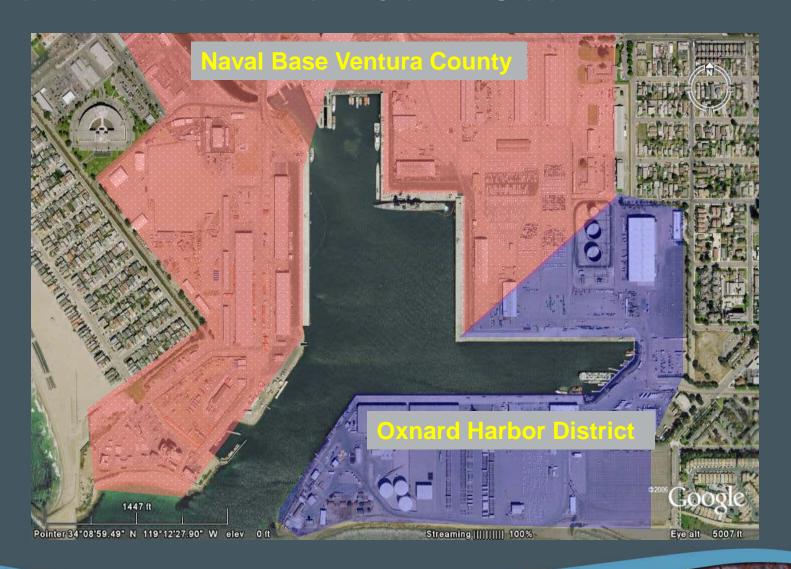

Current Uses

- USN
 - Construction Battalion Center
 - Naval Surface Warfare Center
 - Pacific Missile Test Range
- OHD
 - Produce import/export
 - Roll On/Roll Off automobile import/export
 - Break bulk/specialty cargo



Multiple Sediment Issues in Harbor

- Federal Channel had accumulated approximately 200,000 cubic meters of mostly clean maintenance material
- USACE had authority to deepen Federal Channel by approximately 1.5 meters
- None of the OHD or USN berths had been dredged in decades, resulting in operational constraints
- Contaminated sediments existed within much of Port of Hueneme Harbor




Sediment Contamination

- Totaled approximately 220,000 cubic meters
- Approximately 60 percent from berths and 40 percent from Federal Channel
- Chemicals of Concern (COCs) include PAHs,
 PCBs, DDT, and TBT
- Mostly fine sands, silts, and clays



Contaminated Sediment

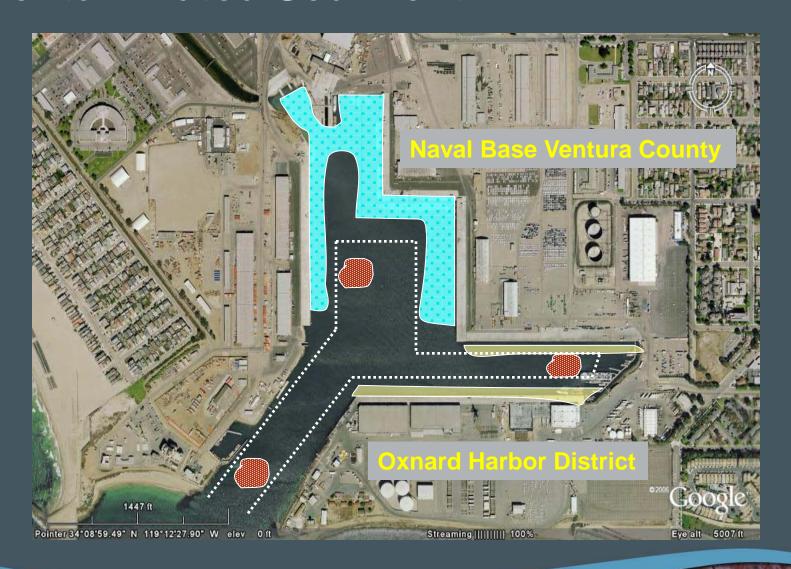

Management Alternatives

- Landfill disposal
- Beneficial reuse
- On-site near shore confined disposal facility (CDF)
- Port fill site at Port of Los Angeles (POLA) or Port of Long Beach (POLB)
- On-site CAD



Rationale for CAD Approach

- Provided an on-site solution
- Not tied to other development or funding
- Provided environmental protection
- Provided local beach nourishment
- Allowed for future Port of Hueneme Harbor deepening to advance
- Restored 100 percent use of USN/OHD wharves
- Provided complete solution for all three parties
- Shared resources = cost effective



Construction Sequencing




Construction Sequencing



Construction Sequencing



Port of Hueneme CAD Cross Section

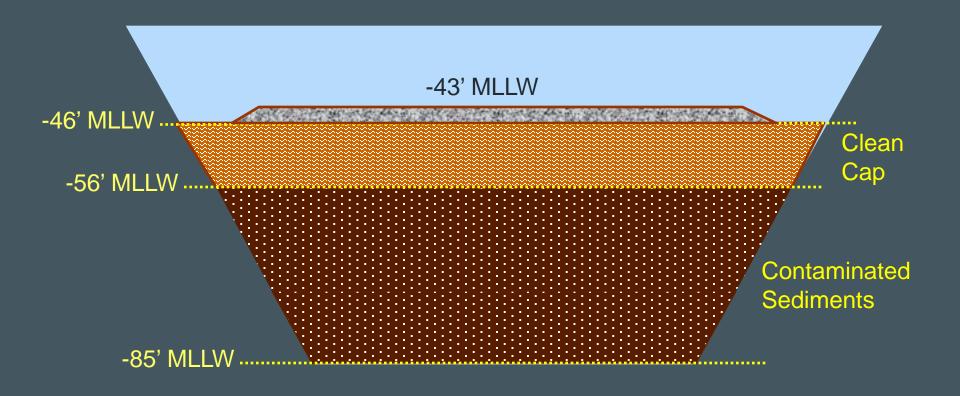



Funding Strategy

- Challenges
 - Raising funds (total project cost approximately \$14 million)
 - Coordinating budget and funding schedules
 - Contractor negotiations and scheduling
- Opportunities
 - All partners had some funds allocated for smaller individual projects
 - Management and staff committed to success
 - Significant project momentum



Cost Sharing Approach

- Break project into components (e.g., CAD cell excavation, USN berths, OHD berths, cap armor placement, long-term monitoring)
- Estimate costs associated with each component
- Assign components to partners based on either ownership or limitations in authority



Cost Sharing Approach

- Fine tune cost components to accommodate secondary cost sharing strategies and funding schedules
 - Financial balancing to make project more equitable among all partners
 - Recognize previous agreements between partners
 - Account for contaminated sediment ownership allocation



Cost Sharing Approach Responsibilities

	Responsibility		
Project Feature	USACE	USN	OHD
Project Development - CEQA/NEPA Permitting - Engineering Design		X X	X X
Contracting - Contract Management	Χ		
Construction - Equipment Mobilization - CAD Cell Excavation - Dredging USN Wharves - Dredging OHD Wharves - Dredging "Hotspots" within O&M Channel - Capping - Placing Rock Armor - Water Quality Monitoring - Sediment Confirmational Sampling - Construction Management	X X X X	X X X X X	X X X X X
Post-Construction Activities - Long-term Monitoring		Χ	Χ



Contracting Approach

- USACE had existing contract with Manson Construction for O&M dredging in Port Hueneme and Channel Islands Harbor
- Contract modification issued for additional work
- OHD/USACE signed Cost Sharing Agreement
- USACE/USN Cost Sharing Agreement for dredging was already in place



Contracting Approach

- OHD/USN signed Cost Sharing Agreement for CAD construction and long-term monitoring/liability
- All funds transferred to USACE for contracting and management



Permitting Strategy

- Project subject to California Environmental Quality Act (CEQA) and National Environmental Policy Act (NEPA) regulations
 - Joint NEPA/CEQA document to streamline processes
- Also subject to Clean Water Act (CWA) regulations



Permitting Strategy

- Separate regulatory components
 - USACE O&M dredging and disposal component (NEPA)
 - Supplemental NEPA document for CAD disposal
 - USN berth dredging and disposal (NEPA and CWA)
 - OHD berth dredging and disposal (CEQA and CWA)
 - CAD cell construction and beach nourishment (NEPA, CEQA, and CWA)
- Joint USN/OHD application for permits to construct the CAD and dredge respective wharves



Initial Design Elements

- Contaminated sediment removal
 - Total of approximately 220,000 cubic meters
 - Mechanically dredged using clamshell
 - Restricted dredging required for some berths
- CAD cell construction and contaminated dredged material disposal
 - Hydraulic excavation of CAD cell
 - Material pumped to beach
 - Contaminated material placed via bottom-dump scow



Initial Design Elements

- CAD cell cap design
 - Chemical isolation
 - Hydrodynamic modeling
 - Geotechnical (i.e., bulking and settling)
 - Bioturbation



Cap Design Critical Elements

- Ship propeller wash scour from USN destroyers
 - Modeled bottom velocities up to 11.4 feet per second
 - Worst-case assumptions capable of producing greater than 5 feet of scour
- Chemical flux
 - Some aquifers in region experience artesian conditions
 - Final elevation critical to prevent significant upward flux



Project Timeline

- Conceptual design for project completed in April 2007
- Design and permitting completed in August 2008 (16 months from conception)
- Construction began in December 2008
- Construction completed in July 2009
- Approximately 1 million cubic yards of dredging



Monitoring Results

- One year of monitoring completed
 - Hydrographic surveys, sediment cores, sediment chemistry, porewater samples
- CAD cell performing as designed
 - Sufficient cap thickness achieved
 - Contaminant isolation achieved
 - Scour resistance achieved
- Authorized depths restored to USN and OHD berths and to Federal Channel



Lessons Learned

- Commitment to succeed from project partners
 - Managers set the tone for staff
- Leverage existing agreements
 - Streamline legal review and contracting processes
- Internal and external communication is critical throughout process
 - Project team coordination is open and continuous
 - Be proactive in communicating with external stakeholders



Project Benefits

- Recreational: Restored Hueneme Beach
- Operations: Restored full navigation use to Harbor
- Future Growth: Provides clear path for Harbor deepening
- Financial: More than \$30 million in benefits achieved for less than \$14 million in costs



Biggest Accomplishment – A Successful Model for a Teaming Approach

